



MANUFACTURER  
FOR THE  
FILTER INDUSTRY  
SINCE 1978

## 83 & 84 SERIES

In-Line Filters

Up To 30,000 PSI



Available in 1" HEX to 2 1/2" RND With  
Recleanable 304-S.S. Elements From 10 to 200 Micron Absolute  
or Beta 200 Microglass Elements, 1 to 25 Micron Absolute




These straight in-line filters are available in 303, 316 and 17-4PH stainless steel that will accommodate the pressures and the gases or liquids required for your application. With precision pleated micron glass and sintered 0.2 to 150 micron abs stainless steel wire elements they will provide the filtration required by any system.

Our 304 stainless steel elements of pleated, recleanable, woven wire have a temperature range of  $-320^{\circ}\text{F}$  to  $+550^{\circ}\text{F}$  and with a choice of filtration ratings ranging from 10 to 200 micron absolute, they should satisfy the most sophisticated installation.

# SAMPLE ASSEMBLY

# HOW TO ORDER


# SAMPLE ELEMENT

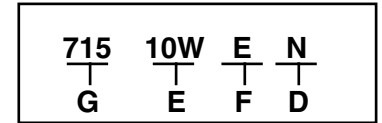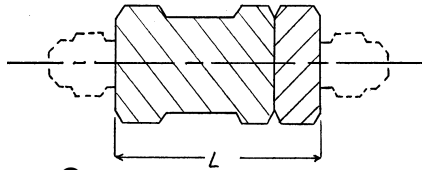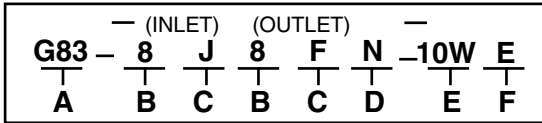

HOUSING MATERIAL		
#	DESCRIPTION	
G83	316 S.S.	3000 PSI
S83	303 S.S.	3000 PSI
P84	17-4 PH. S.S.	6000 PSI
P84 10K	17-4 PH. SS	10000 PSI

PORT SIZE	
#	PORT
2	1/8
4	1/4
6	3/8
8	1/2
12	3/4
16	1

FITTING	
#	DESCRIPTION
D	Male O-Ring
F	Female Pipe
J	MS-33656
S	MS-33649

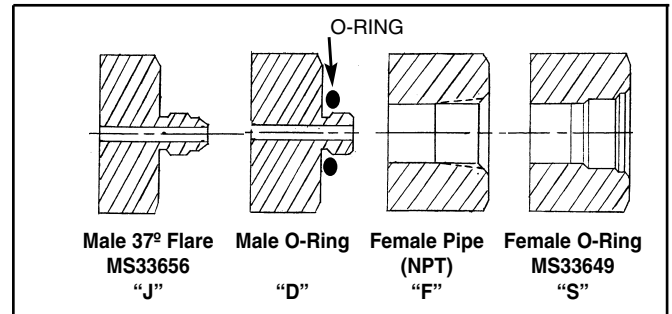

O-RINGS		
#	MATERIAL	TEMPERATURES
N	Nitrile (Buna "N")	- 40°F TO 250°F
V	Viton ®	- 20°F TO 400°F
S	TEV	- 4°F TO 400°F
E	Ethyl Prop	- 60°F TO 300°F
K	Kalrez ®	- 40°F TO 550°F



MICRON RATING					
#	DESCRIPTION	ABS	#	DESCRIPTION	ABS
10W	S.S Wire Mesh	10	3M	Microglass	3
18W	S.S Wire Mesh	18	6M	Microglass	6
25W	S.S Wire Mesh	25	12M	Microglass	12
40W	S.S Wire Mesh	40			
75W	S.S Wire Mesh	75			
150W	S.S Wire Mesh	150			

COLLAPSE RATING	
#	PRESSURE
D	3250 PSID
E	4500 PSID

REPLACEMENT ELEMENT
see specification chart

## SPECIFICATIONS

Material Size 1" Hex			Material Size 1-1/2" Hex			Material Size 1-1/2" Hex			Material Size 2" Hex or 2-1/4" Rnd			Material Size 2-3/8" Hex or 2-1/2" Rnd		
THREADS	SIZE	O.A.L.	THREADS	SIZE	O.A.L.	THREADS	SIZE	O.A.L.	THREADS	SIZE	O.A.L.	THREADS	SIZE	O.A.L.
NPT	1/8	4.81	NPT	1/8	4.75	NPT	1/4	6	NPT	1/2	7.75	NPT	3/4	8.75
Male O-Ring	1/4	4.12	Male O-Ring	3/8	4.25	Male O-Ring	1/2	5.5	Male O-Ring	3/4	7	Male O-Ring	1	8.25
MS33649	-4	4.81	MS33649	-6	4.75	MS33649	-8	6	MS33649	-12	7.75	MS33649	-16	8.75
MS33656	-4	4.12	MS33656	-6	4.25	MS33656	-8	5.5	MS33656	-12	7	MS33656	-16	8.25
<b>Rated Flow*</b> Oil at 150ssu - 2.5GPM Air at 100PSIG - 15SCFM Air at 3000PSIG - 155SCFM Element Area - 8.5in <sup>2</sup> Replacement Element - 711			<b>Rated Flow*</b> Oil at 150ssu - 6GPM Air at 100PSIG - 40SCFM Air at 3000PSIG - 295SCFM Element Area - 15in <sup>2</sup> Replacement Element - 712			<b>Rated Flow*</b> Oil at 150ssu - 10GPM Air at 100PSIG - 75SCFM Air at 3000PSIG - 550SCFM Element Area - 25in <sup>2</sup> Replacement Element - 713			<b>Rated Flow*</b> Oil at 150ssu - 16GPM Air at 100PSIG - 195SCFM Air at 3000PSIG - 1150SCFM Element Area - 60in <sup>2</sup> Replacement Element - 715			<b>Rated Flow*</b> Oil at 150ssu - 40GPM Air at 100PSIG - 340SCFM Air at 3000PSIG - 1625SCFM Element Area - 101in <sup>2</sup> Replacement Element - 716		

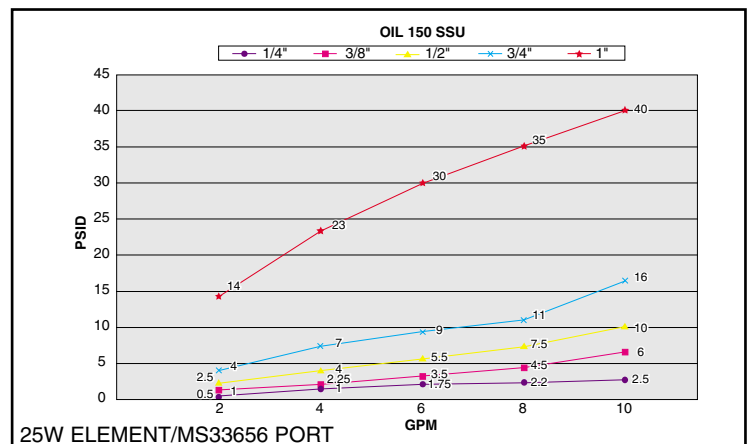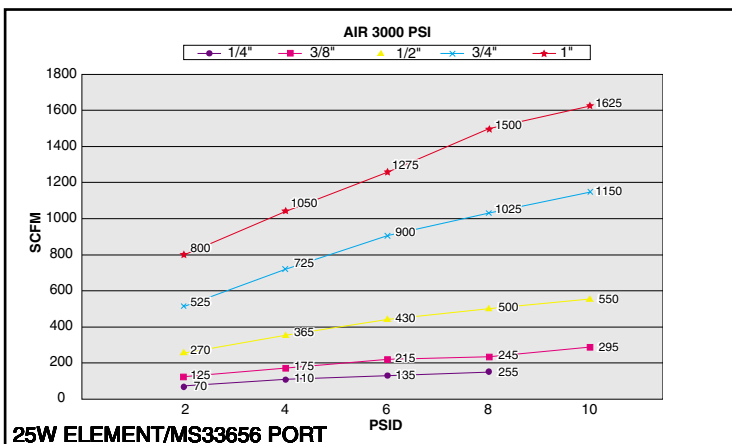

© T.M. of DuPont



4642 West 92nd Street  
 Oak Lawn, IL 60453  
 Phone (708) 636-6240  
 Toll Free 866-3BFILTERS (323-4583)  
 Fax (708) 636-6251  
 3Bfilters@ameritech.net